


**Válečkové řetězy** - s lomenými články ROTARY - dle DIN 8182 / ANSI API

**Rollenketten** - mit gekröpften Gliedern ROTARY-Ketten - nach DIN 8182 / ANSI API

**Roller chains** - with cranked links ROTARY - to DIN 8182 / ANSI API

**Роликовые цепи** – с гнутыми спецпластинами ROTARY - согласно DIN 8182 / ANSI API

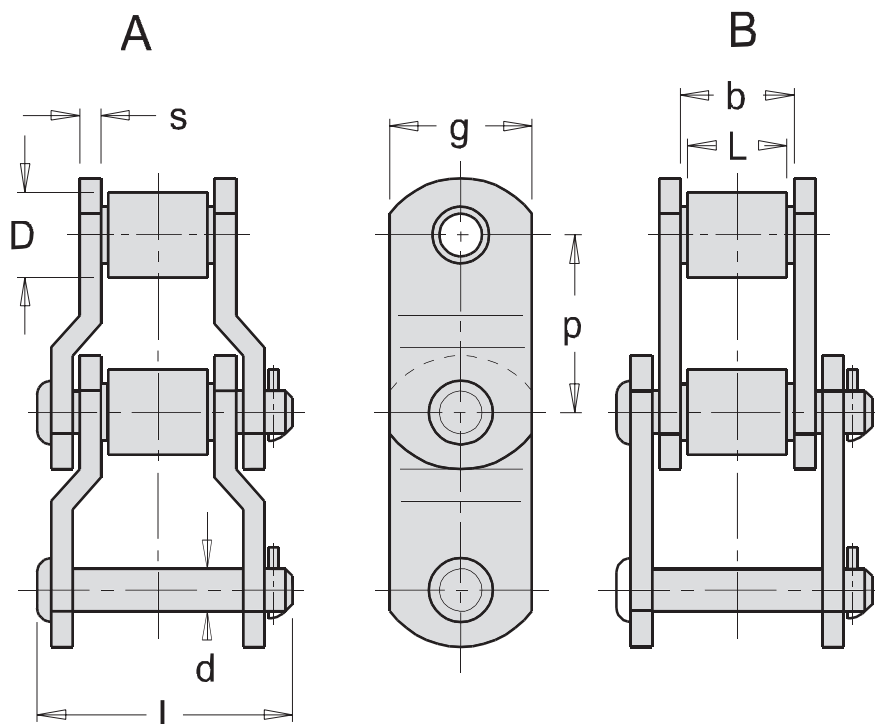

Tov. oz. Betr. Nr. Firm. no. Зав. обозн.	Typ Type Тип	p inch	p mm	b mm min.	d mm	D mm	l mm	g mm	s mm	F <sub>B</sub> kN	F <sub>A</sub> kg	Q kg/m
RV-TXS 882	A	2,610	66,3	27,5	11,1	22,2	68	29	6,3	127	1,135	5,57
RV- 603	A	3,000	76,2	38,0	14,0	-	86,5	40	8,0	240	2,145	9,80
RV-3067X	A	3,067	77,9	40,0	19,00	41,30	98,7	50	10,0	500	2,724	19,1
RV-3	A	3,075	78,1	38,1	17,92	31,75	93,0	45	8,0	340	2,315	12,3
RV-3 PD	B	3,075	78,1	38,0	17,92	31,75	87,0	45	8,0	340	2,315	11,6
RV-1664 A	A	4,000	101,6	55,5	30,18	57,15	141,0	82	14,0	1135	6,674	41,4
RV-4	A	4,063	103,2	49,2	23,92	44,45	129,0	60	14,0	680	4,086	26,4
RV-4 UP	A	4,063	103,2	49,2	23,92	60,00	129,0	60	14,0	680	4,086	31,0
RV-E 4073	A	4,073	103,4	49,5	25,40	45,20	131,0	60	14,0	771	5,221	27,2
RV-795	A	4,090	103,89	49,2	25,40	50,80	135,0	70	15,0	900	5,221	31,8
RV-1605 AAA	A	5,000	127,0	64,5	34,90	63,50	168,5	90	19,0	1700	9,534	59,6
RV-5	A	5,000	127,0	70,0	34,90	63,50	174,0	90	19,0	1700	9,534	60,6

